

Swing Loader

Type SL 25



Swing Loader

Carnitech's hydraulic Swing Loader type SL25 is designed for lifting and discharging of standard 200 l and 300 l meat bins.

During emptying the meat bin can be stopped and held in any position required, which makes the lift very useful for portioning e.g. out on a table or via the accumulating chute down into trays or boxes.

The swing loader type SL25 is equipped with a compact, integral electrohydraulic pump station, complete with oil tank, valves, stainless steel cylinder, motor guard, and terminal points. All internal electric and

hydraulic connections are supplied linked and screened.



Electric switch for activation of up and down movements. The hydraulic pump motor is running during up and down movements only. As standard the control board is placed to the right.

The swing loader's open design in stainless steel facilitates daily cleaning.

The Carnitech swing loader type SL25 is available either stationary prepared for securing to the floor or moveable.



Swing Loader SL25

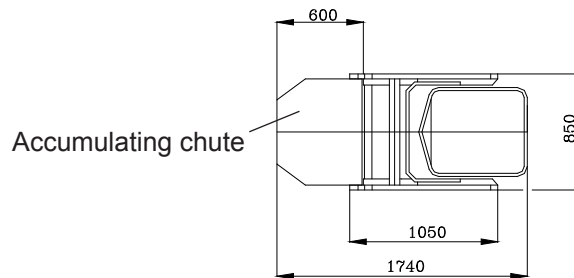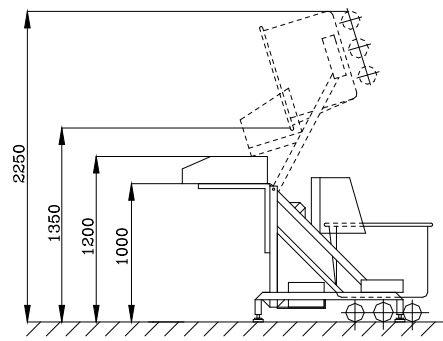

Technical Specifications:

Electric connections:

Motor: 1.1 kW
 Voltage: 3x400 V - 50 c/s
 or as required
 Control voltage 24V

Materials:

The loader is made of stainless steel (AISI 304) except from the hydraulic and electric components. Stainless cylinder and fittings. Nylon wheel or Neoprene machine shoes.

Finish: Bead blasted or polished.

Capacity:

Lifting capacity: max. 300 kg
 Lifting time: min. 15 sec.
 Weight: 200 kg
 Gross weight: 225 kg
 Volume: 2.16 m³

Optional Extras:

- Removable accumulating chute
- Mobile frame (2 or 4 wheels)
- Receiving table

The swing loader SL25 is also available with compressed-air operation.

Carnitech offers loaders in sizes from 50 to 1,200 kg with discharge heights up to 6 m. Ask for special brochures.

Carnitech is a member of the Marel Group

Carnitech A/S
 Juelstrupparken 14
 9530 Støvring
 Denmark
 Tel +45 99 86 40 00
 Fax +45 99 86 40 01
 E-mail: ct@carnitech.dk

Carnitech U.S. Inc.
 1112 NW Leary Way, Seattle,
 WA 98107-5133
 USA
 Tel +1 (206) 781 1827
 Fax +1 (206) 781 1828
 E-mail: ctus@carnitech.net

Carnitech Norge AS
 Kjøepmannsgate 23,
 6005 Aalesund,
 Norway
 Tel +47 70 13 63 20
 Fax +47 70 13 63 21
 E-mail: ct@carnitech.dk

Carnitech Asia Ltd.
 8th Floor, Dr. Gerhard Link Bldg.,
 33 Soi Lertnava, Krungthepkreetha Rd.,
 Huamark, Bangkok, Bangkok 10240
 Thailand
 Tel +66 2 379 4200, Fax +66 2 379 4204
 E-mail: carnitech@carnitech.co.th

